


Ausfahren (extend): 267N / 482N  
 Einfahren (retract): 220N / 415N

	Grundkoerper	Schlitten	gesamte Masse		bewegte Masse	F	F	M
	basic build	slide	KED 0025	KED 0032				
Nennhub (rated lift)	L1 [mm]	L2 [mm]	[kg]	[kg]	[kg]	[N]	[N]	[Nm]
0300	450	460	11.62	12.01	5.71	120	220	75
0250	400	410	10.77	11.12	5.39	150	250	75
0200	350	360	9.93	10.25	5.06	175	300	75
0160	310	320	9.23	9.52	4.81	210	340	75
0125	275	285	8.64	8.90	4.58	240	370	75
0100	250	260	7.95	8.20	4.42	260	400	75
0080	230	240	7.91	8.14	4.29	290	450	75
0050	200	210	7.41	7.62	4.10	350	500	75
0040	190	200	7.23	7.43	4.04	390	520	75
0025	175	185	6.99	7.18	3.94	420	550	75
0010	160	170	6.73	6.91	3.84	450	600	75

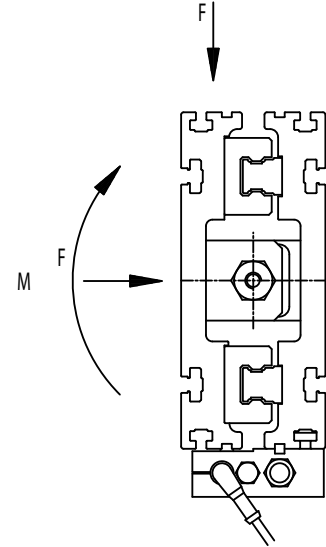

Bestellangaben:  
 order code:

zul. Belastung fuer 6000km Hub  
 max. permissible for 6000km lift

Kurzhubeinheit KED 00\_\_\_\_  
 short stroke unit

normal / spiegelbildlich  
 regular / in reverse image

Nennhub: 0010, 0025, 0040, 0050, 0080,  
 rated lift: 0100, 0125, 0160, 0200, 0250,  
 0300  
 Zylinderdurchmesser: 25, 32  
 cylinder diameter: